


FourLikes® Meet 1400

Lightning and Power Units Installation

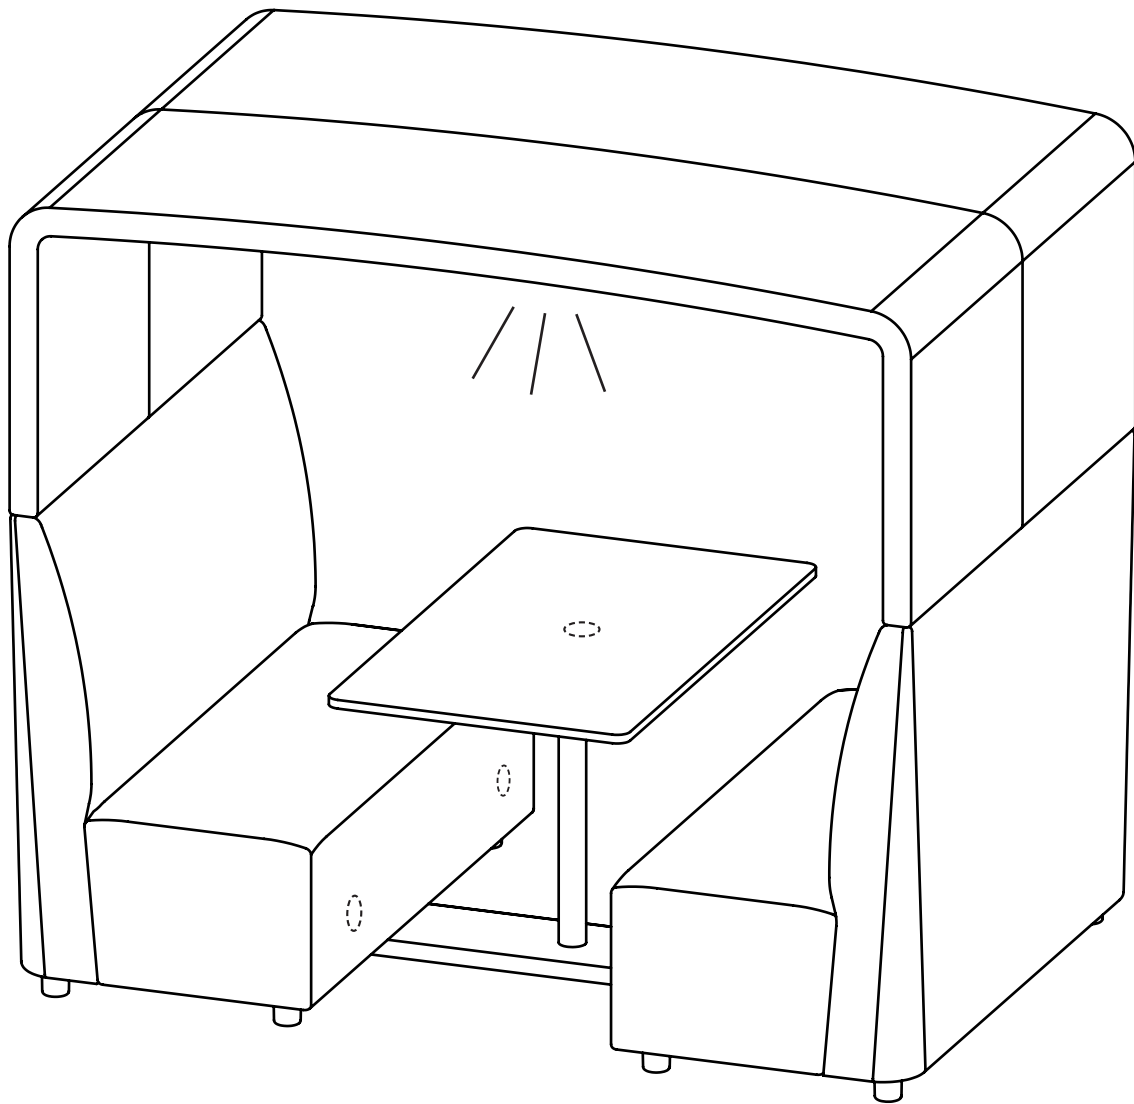


Lightning Installation	2
Power Units Installation	4
Recommended Light & Units	6

ATTENTION! Authorised personnel must perform all electrical fittings.

1

Lightning Installation

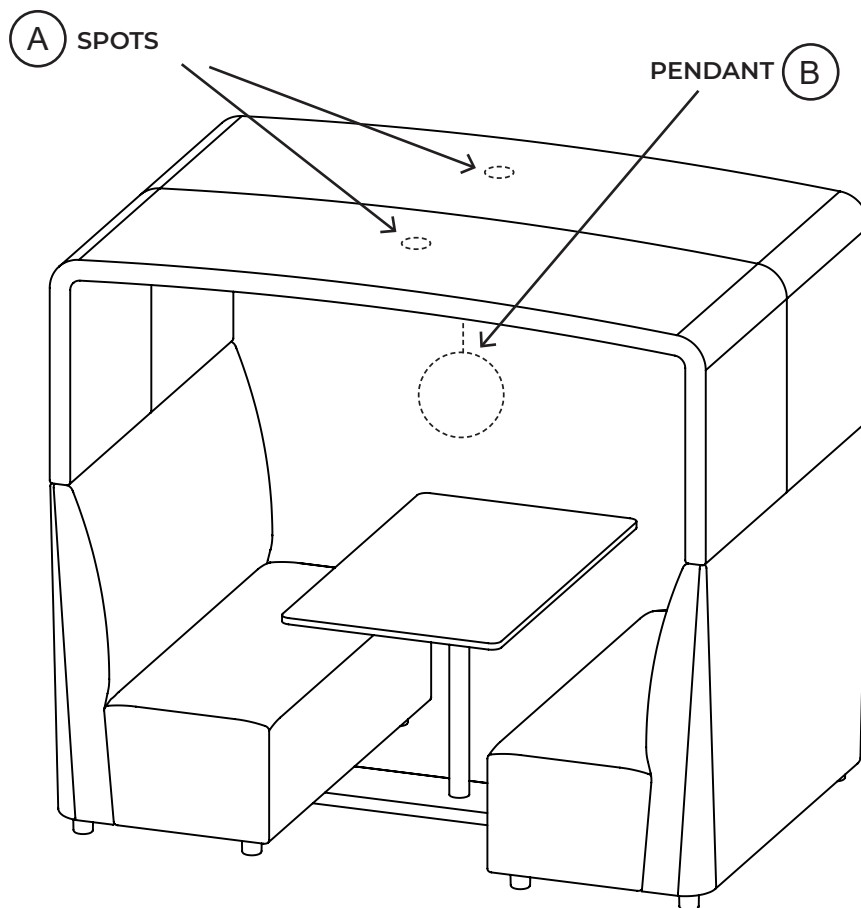


2

A1

SPOTS


Make a hole for lighting installation in the desired size.
Predrilled hole (Ø20 mm) in the construction.



B1

PENDANT


Lead the wire to the centre of separation between the roofs if centred lighting is desired.
(Pendant max weight 10 kg)

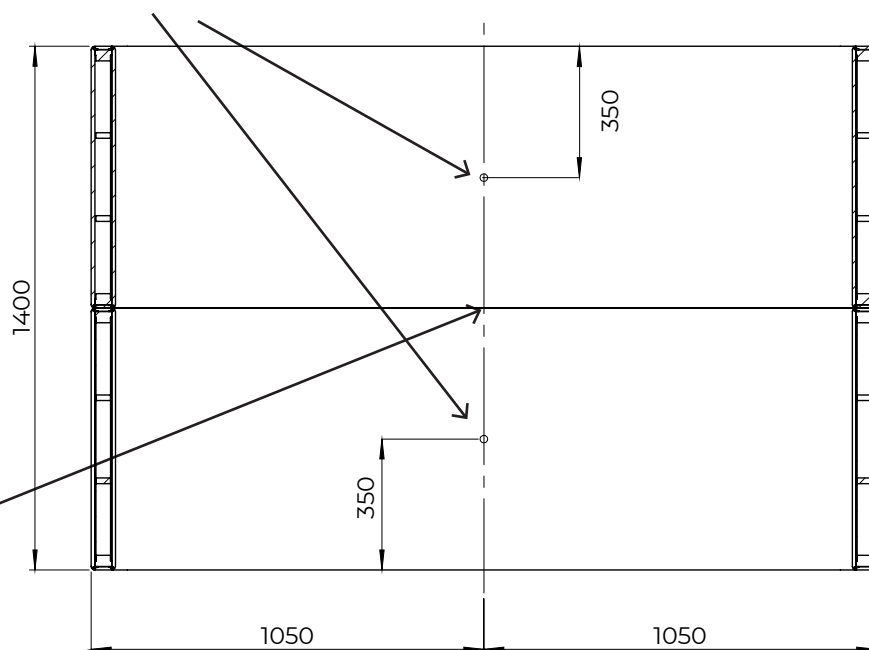


3

CONDUIT

The construction is prepared with a conduit for pulling a wire through.

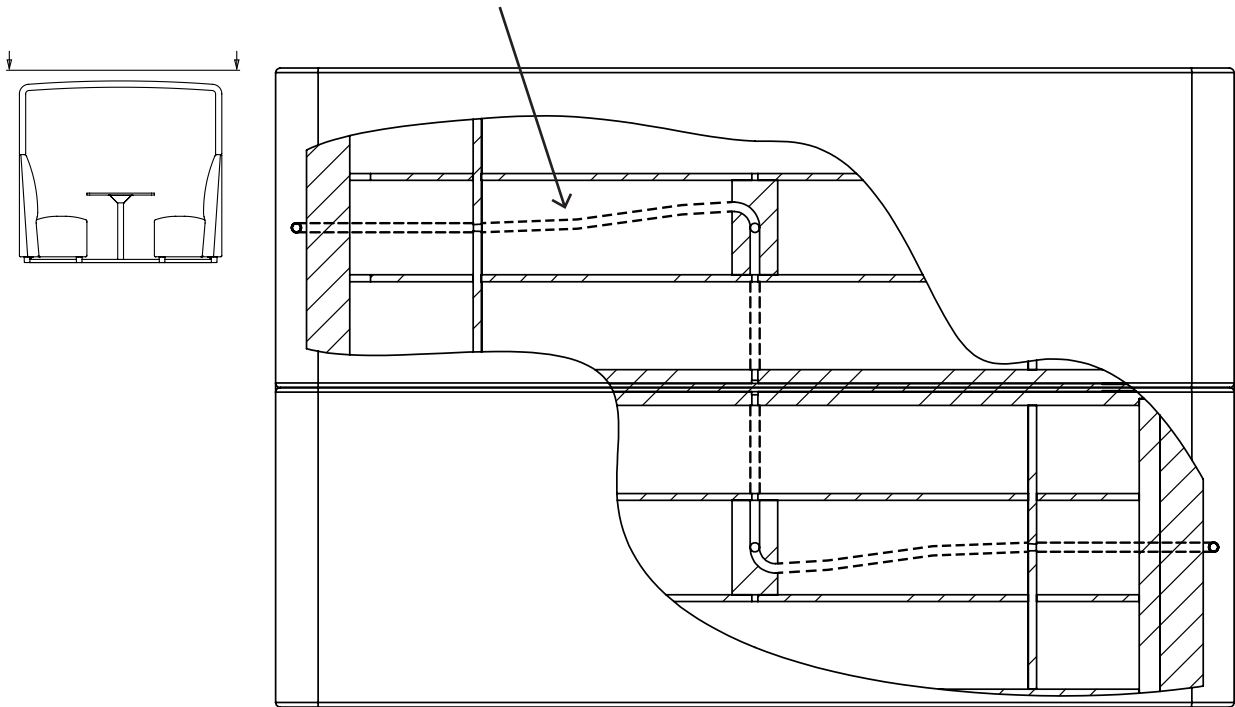


4

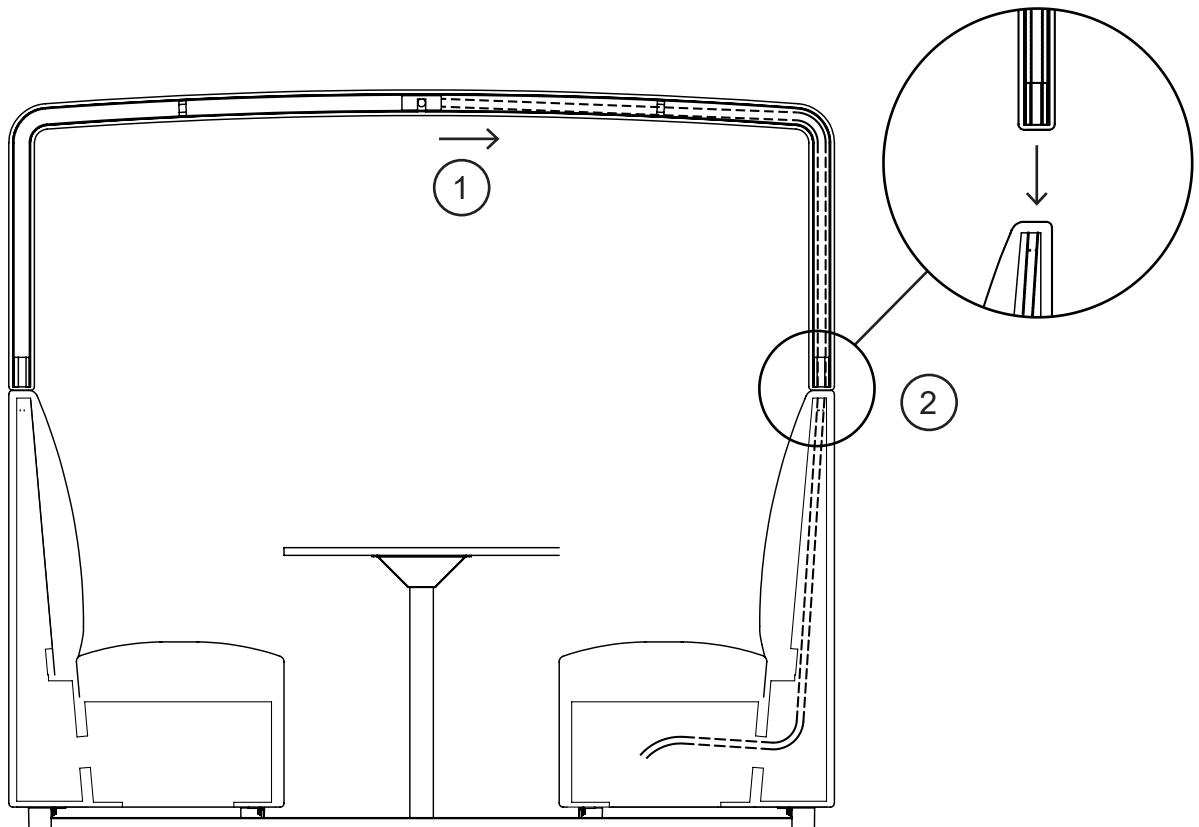

1


Power Unit Installation

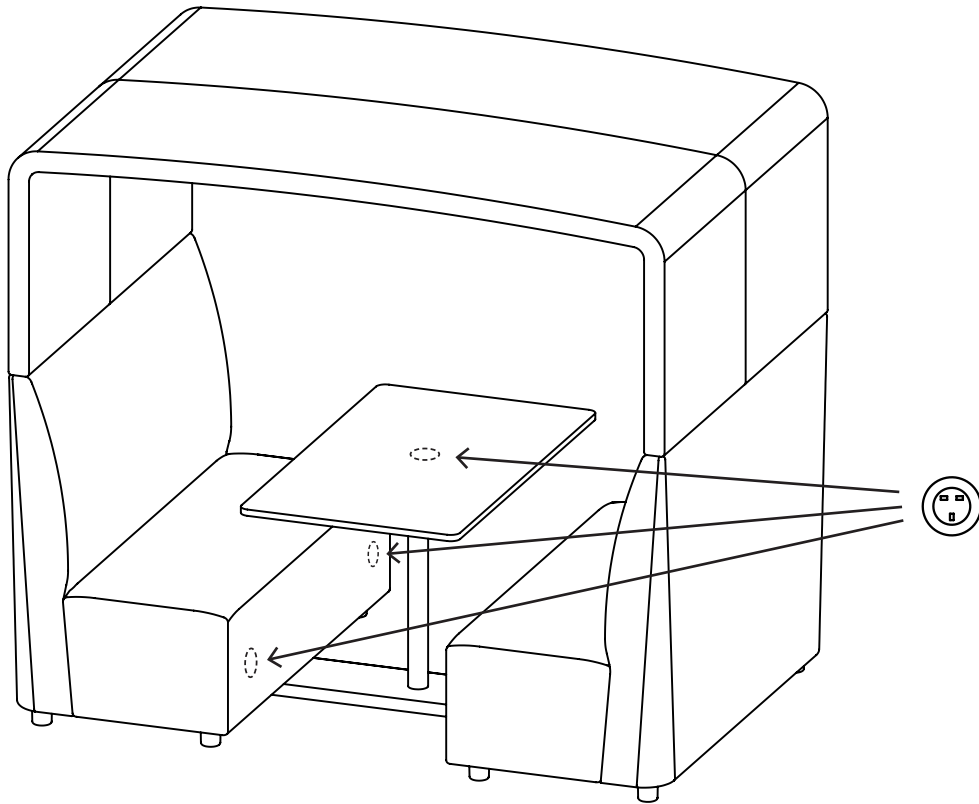


2

A


Max Ø60
Place the power unit
in the sides if Max
Ø60 is desired.

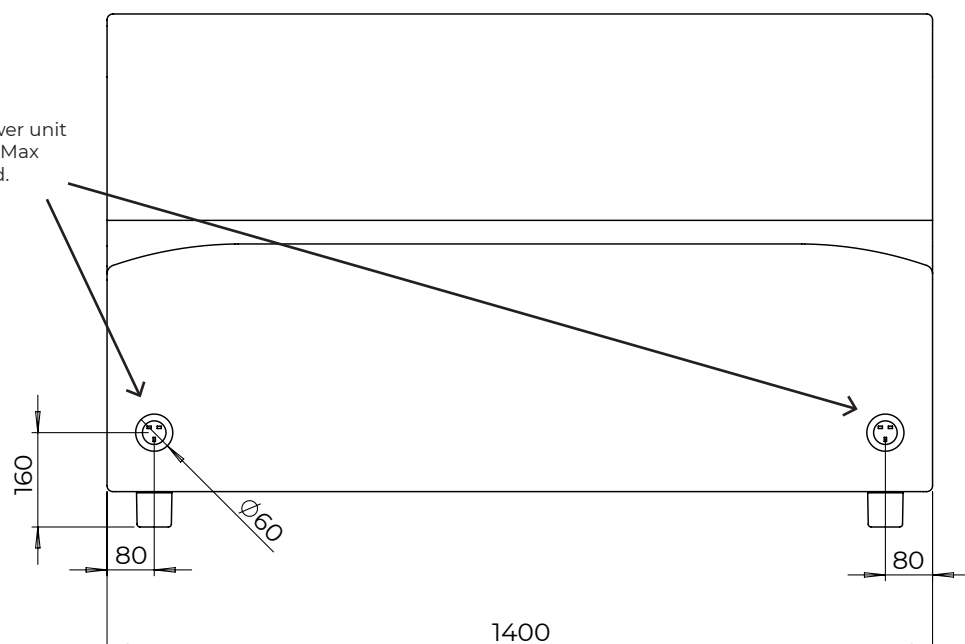

3

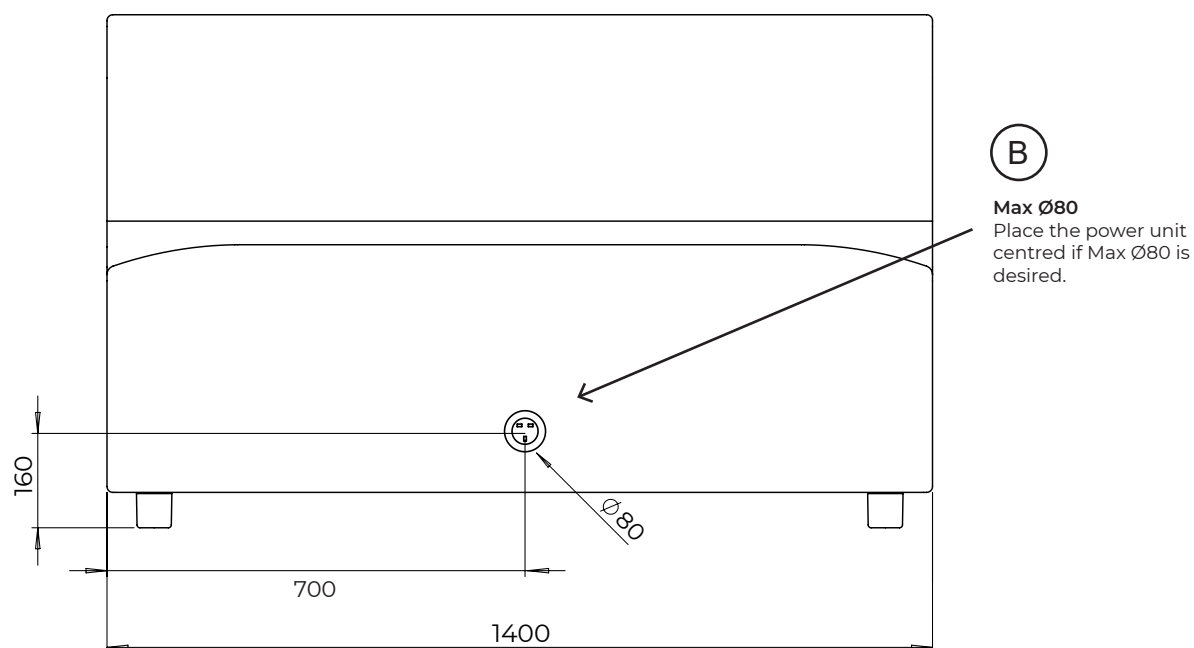



4

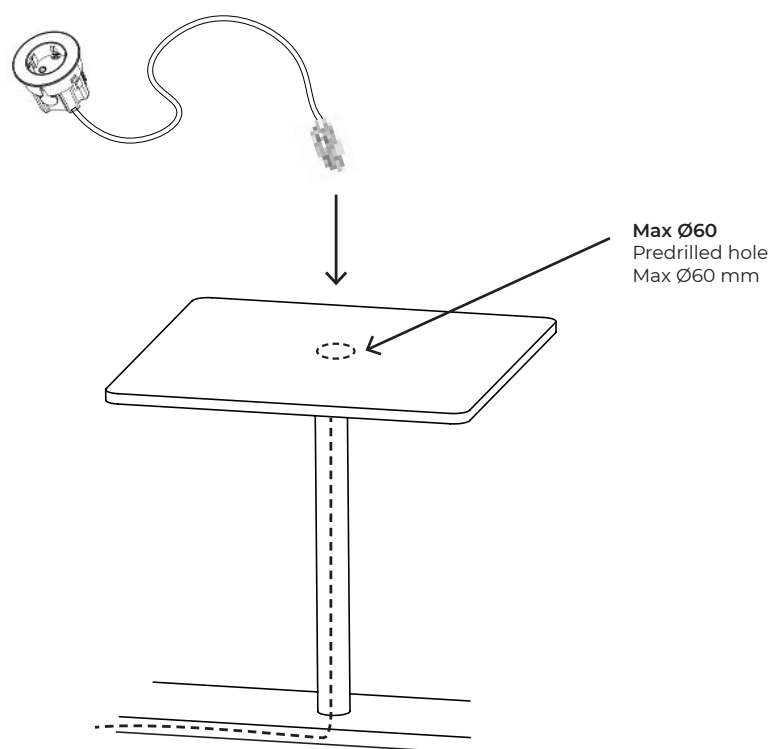

Lightning

HÄFELE LOOX LED 2047

Loox 12v LED 2047 Downlight 65 mm Warm White 3000 K



Power Units

VERSADOT


Is an easy and compact power system. Thanks to its small installation hole (only 60 mm) and the top mounting,



FINISHES








Brushed stainless steel



White glass



White glass

Electrical sockets			  EF	  EF	  GU	 SB
						
code	Ring	acciaio inox spazzolato o brushed stainless steel	06030E000010	6030F000010	6030G000010	6030Y00001
	Polish chrome	vetro bianco white glass	06030E000020	6030F000020	6030G000020	6030Y00002
		vetro nero black glass	06030E000030	6030F000030	6030G000030	6030Y00003
DIM. L x H x W (mm) 			20 x 14.5 x 15 mm			
CAVI INCLUSI / ESCLUSI CABLES INCLUDED / NOT INCLUDE			D  			
MATERIALI ROW MATERIALS			Zama Zinc alloy - Tecnopolimero Technopolymer			
DIMENSIONI DIMENSIONS 			PIANO DI TAGLIO CUT OUT DRAWING 			

Four Design

Lucernemarken 17-19

DK-5260 Odense S.

Tel. (+45) 62 29 19 77

www.fourdesign.dk

FOUR
DESIGN


AN OCEE
INTERNATIONAL
COMPANY